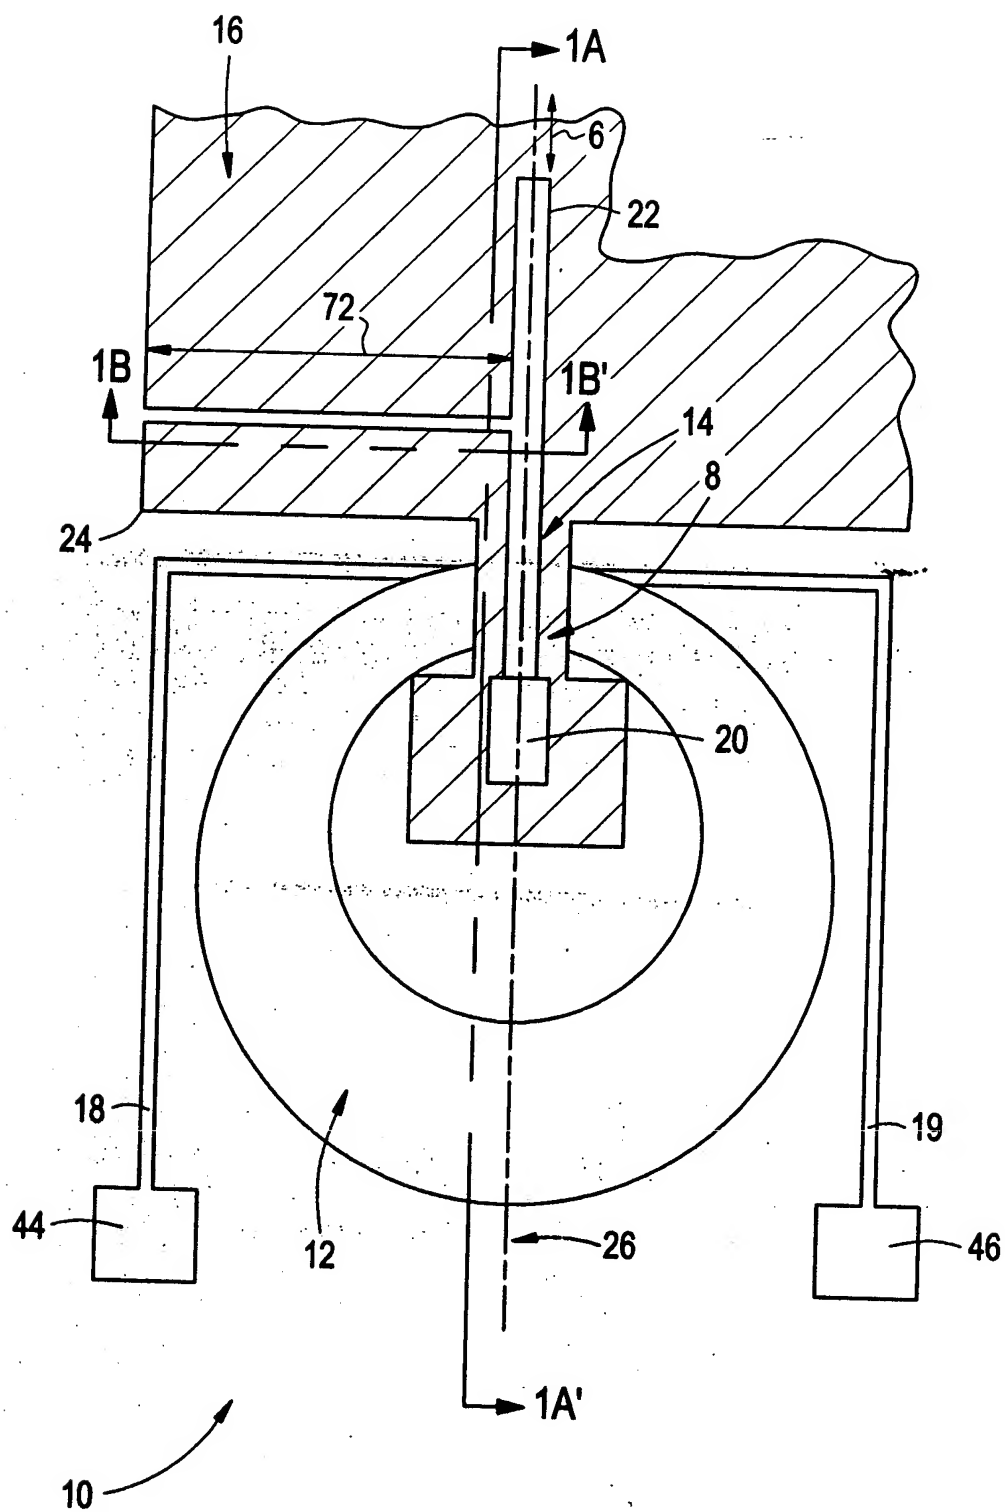


[illegible]

54






FIG. 1C

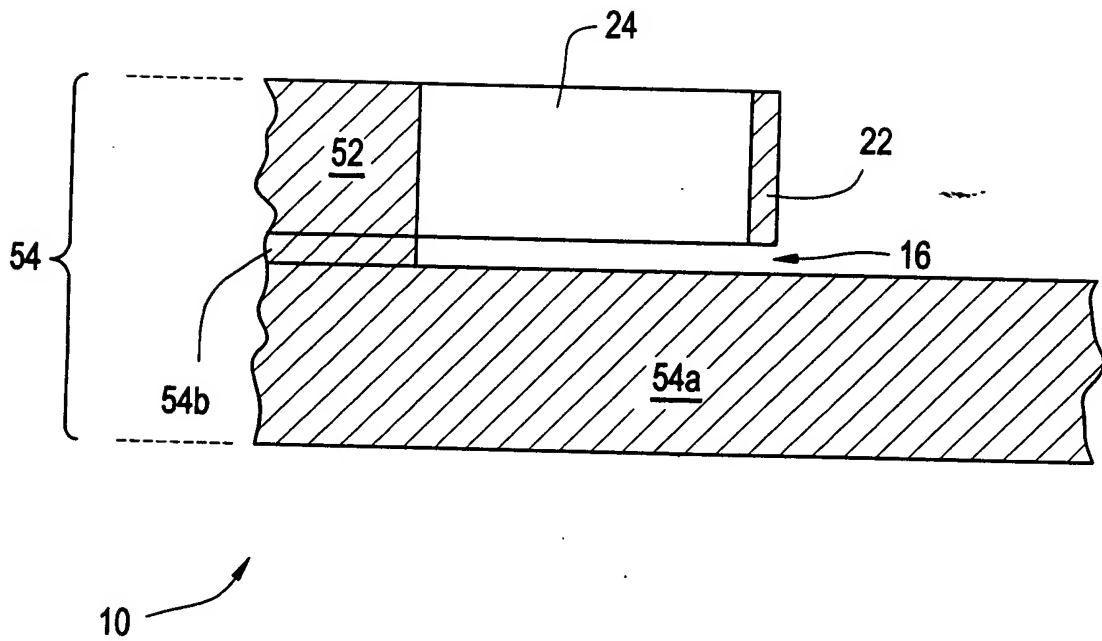

4/31


FIG. 2A is a perspective view of the device 10 in a closed position. The device 10 includes a handle 12 and a plurality of blades 14. The blades 14 are arranged in a fan-like configuration and are connected to the handle 12 by a pivot 16. The blades 14 are shown in a closed position, where they are folded against the handle 12. The handle 12 is shown in a perspective view, and the blades 14 are shown in a perspective view. The device 10 is shown in a perspective view, and the handle 12 is shown in a perspective view. The blades 14 are shown in a perspective view, and the pivot 16 is shown in a perspective view. The device 10 is shown in a perspective view, and the handle 12 is shown in a perspective view. The blades 14 are shown in a perspective view, and the pivot 16 is shown in a perspective view.

FIG. 2A

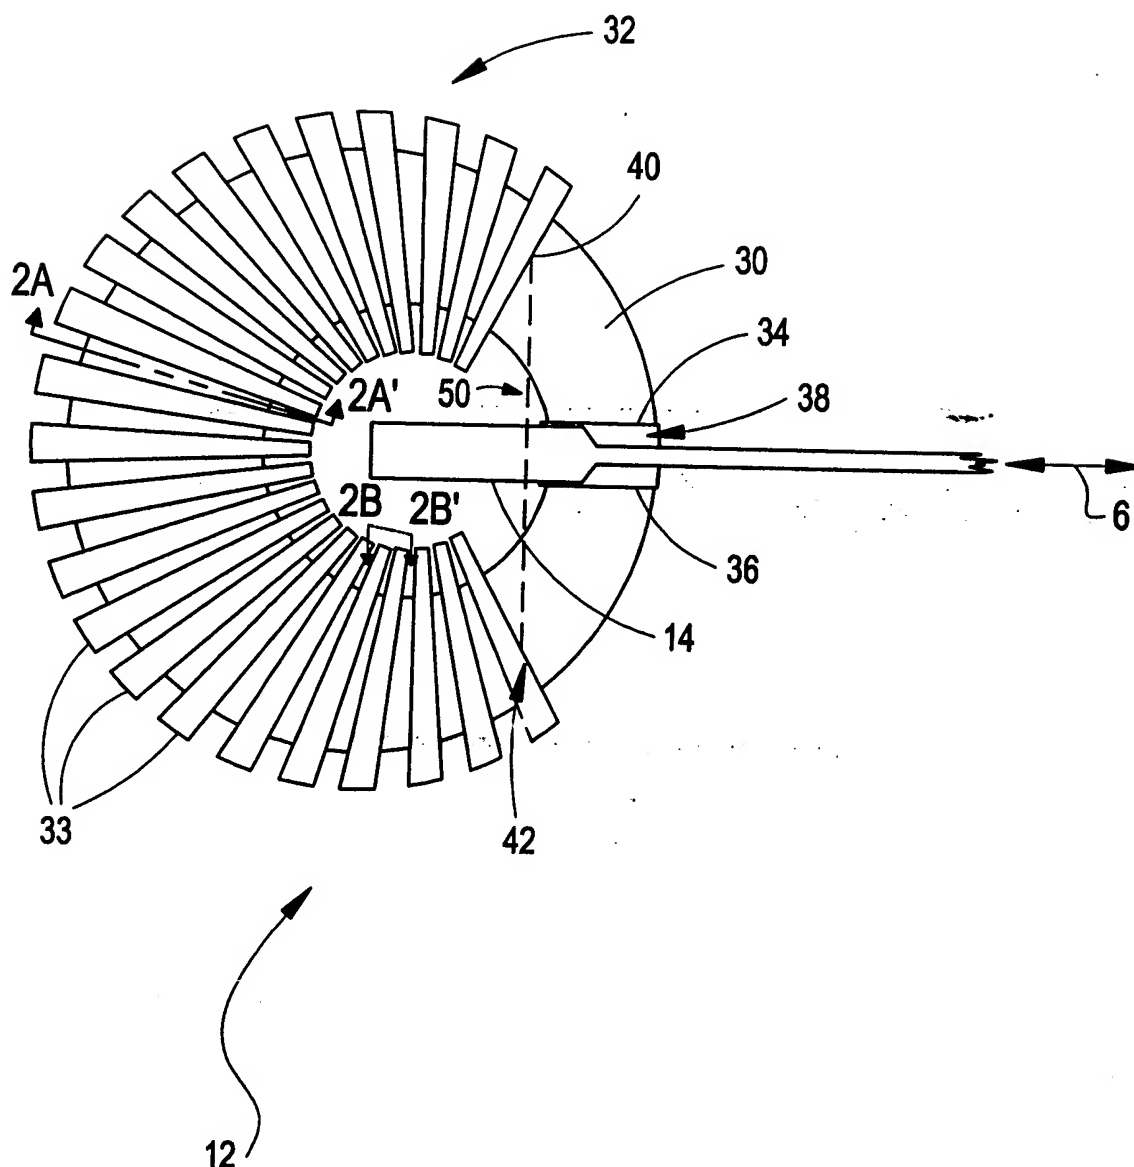


5/31

FIG. 2B

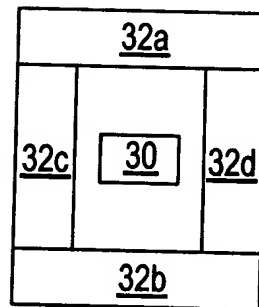

33

FIG. 2C

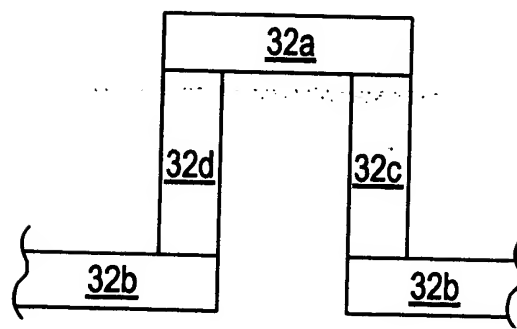

33

FIG. 2D



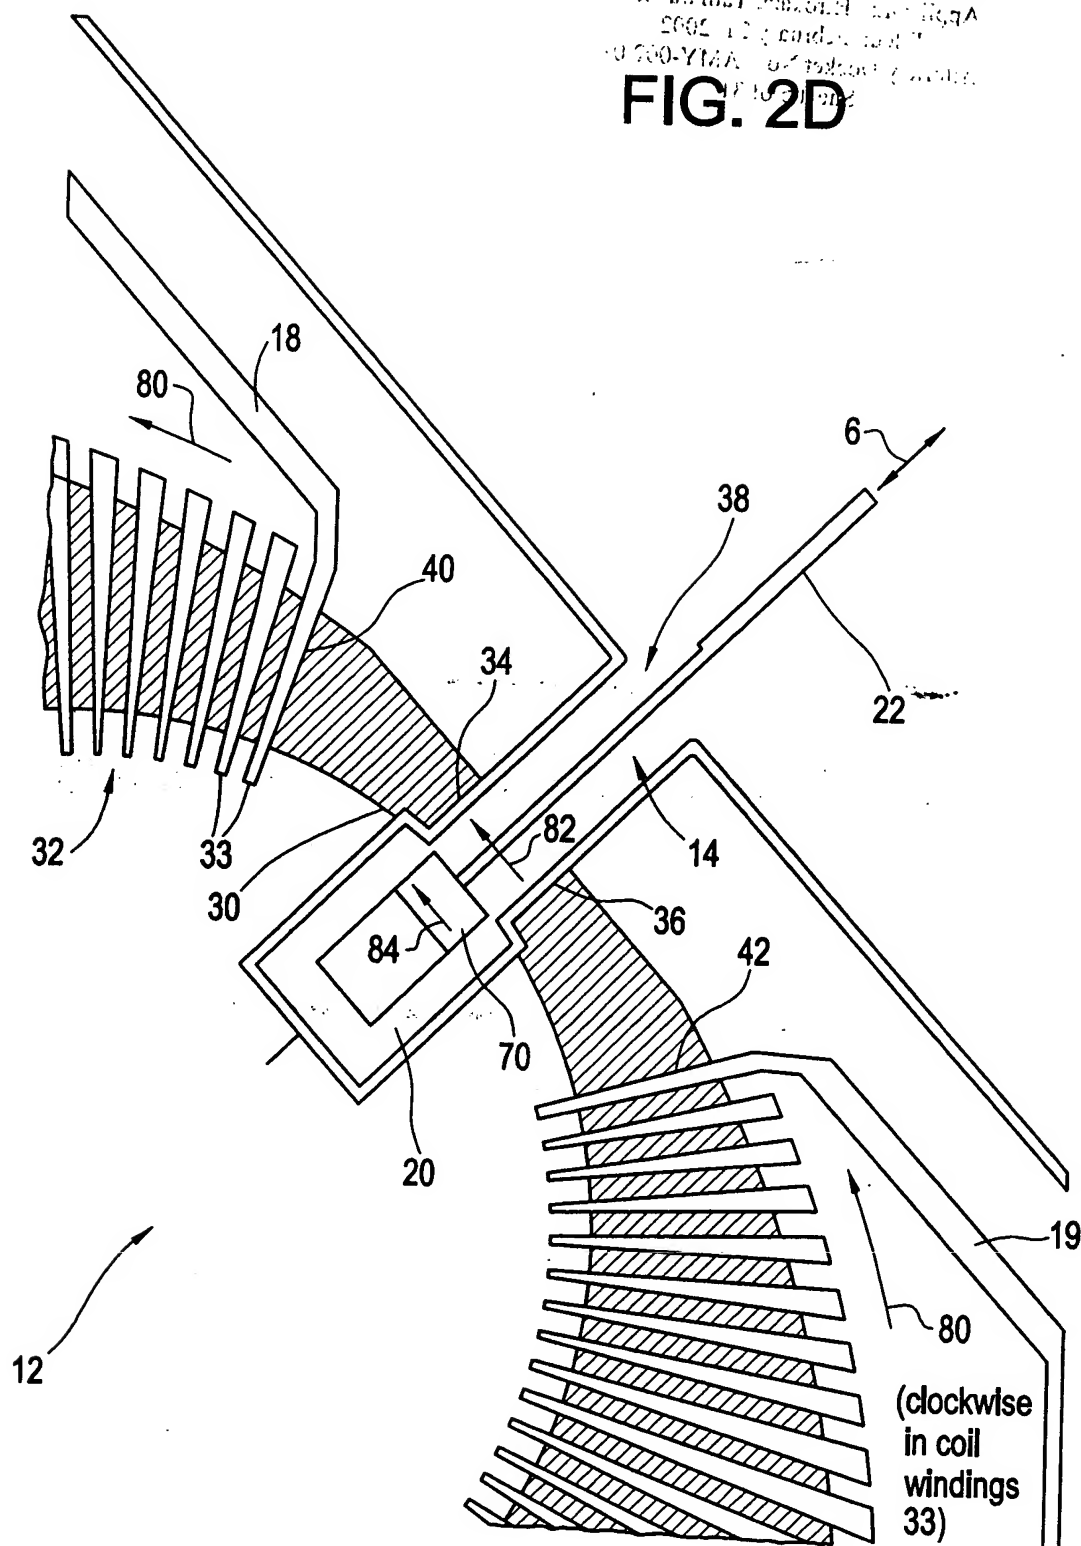


FIG. 3A

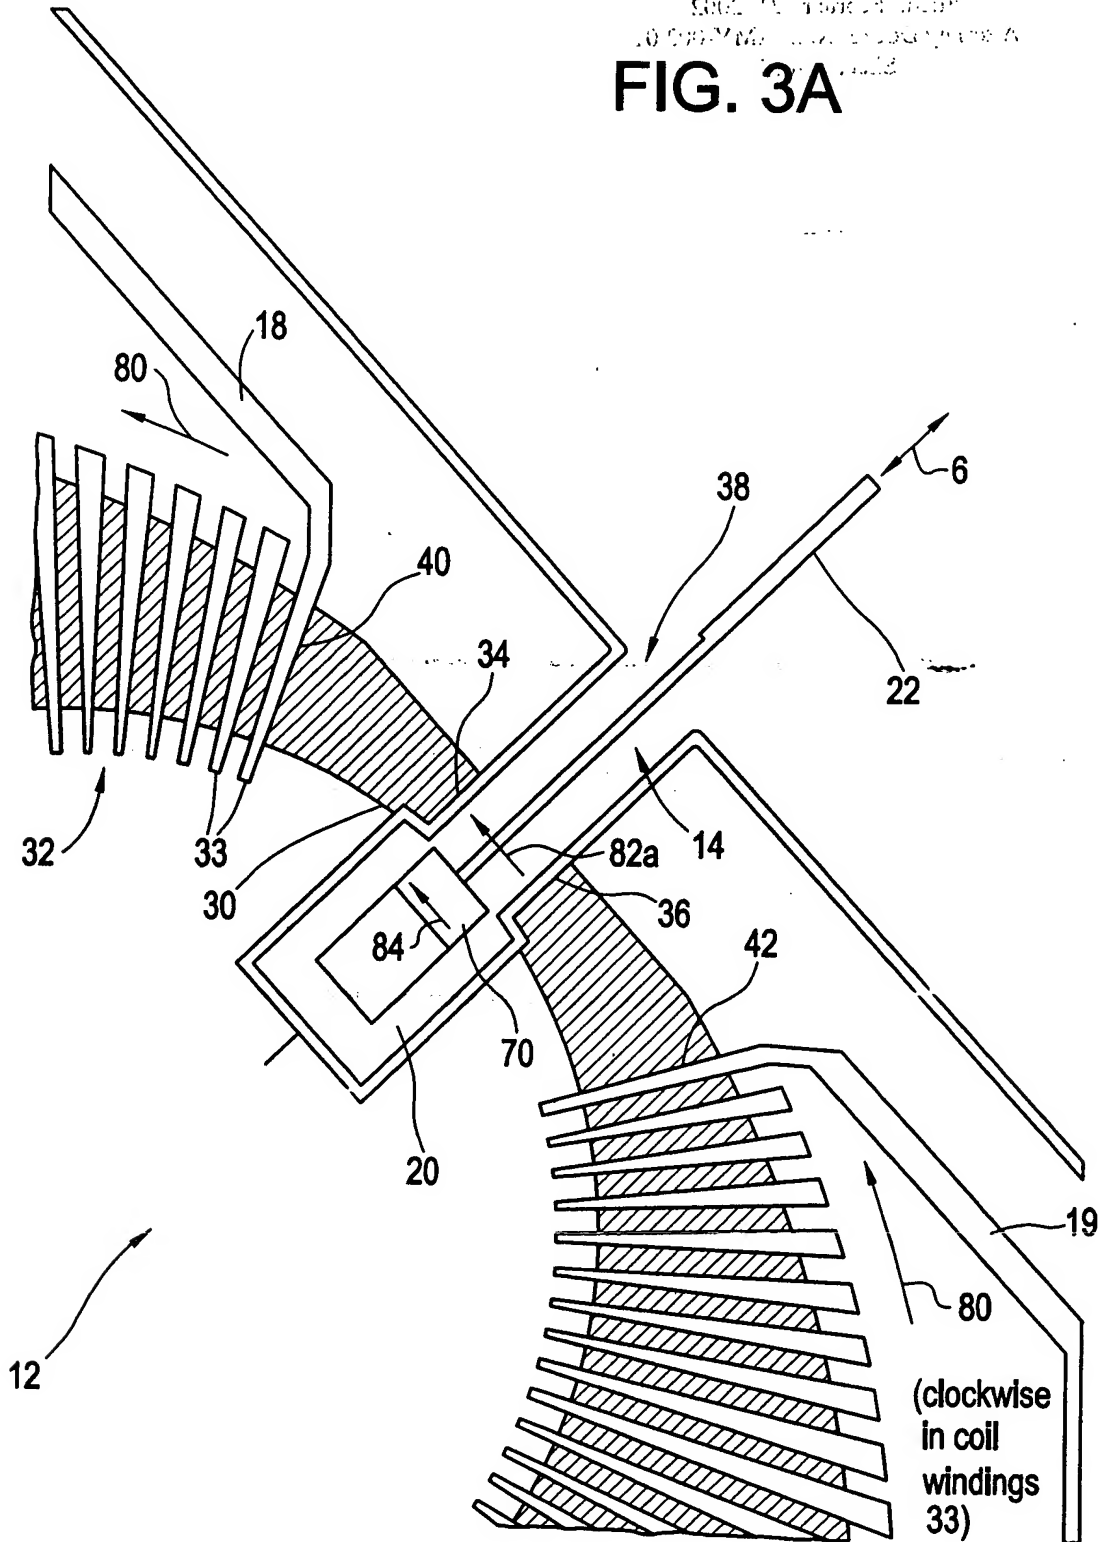

8/31


FIG. 3B

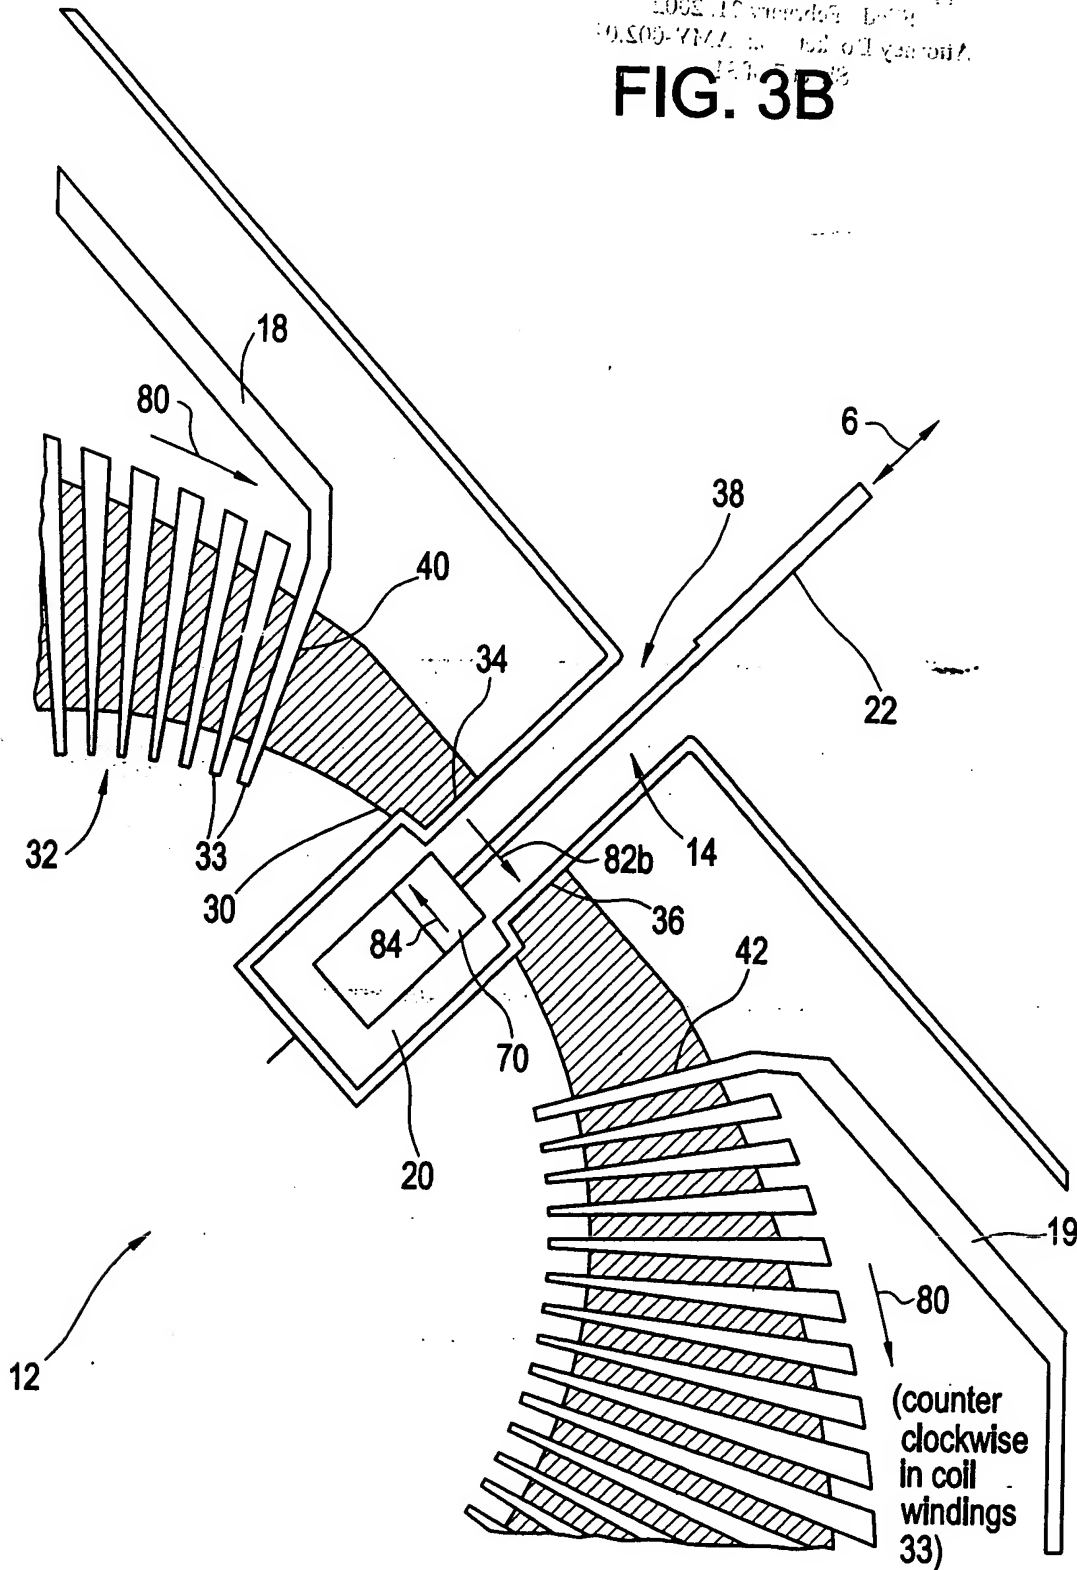

9/31


FIG. 4A is a cross-sectional view of the device 100 in a closed position. The device 100 includes a housing 20 and a plurality of blades 30. The blades 30 are arranged in a fan-like configuration and are connected to a central shaft 22. The shaft 22 is supported by a bearing 70 and a seal 90. The seal 90 is located at the junction of the shaft 22 and the housing 20. The blades 30 are shown in a closed position, where they are aligned with the housing 20. The device 100 is shown in a cross-sectional view, with the housing 20 and the blades 30 being the primary components. The shaft 22 is a long, thin rod that passes through the housing 20. The bearing 70 is a cylindrical component that supports the shaft 22. The seal 90 is a ring-like component that prevents leakage of fluid from the housing 20. The blades 30 are a series of curved, flat surfaces that are attached to the shaft 22. The blades 30 are shown in a closed position, where they are aligned with the housing 20. The device 100 is shown in a cross-sectional view, with the housing 20 and the blades 30 being the primary components. The shaft 22 is a long, thin rod that passes through the housing 20. The bearing 70 is a cylindrical component that supports the shaft 22. The seal 90 is a ring-like component that prevents leakage of fluid from the housing 20. The blades 30 are a series of curved, flat surfaces that are attached to the shaft 22. The blades 30 are shown in a closed position, where they are aligned with the housing 20.

FIG. 4A

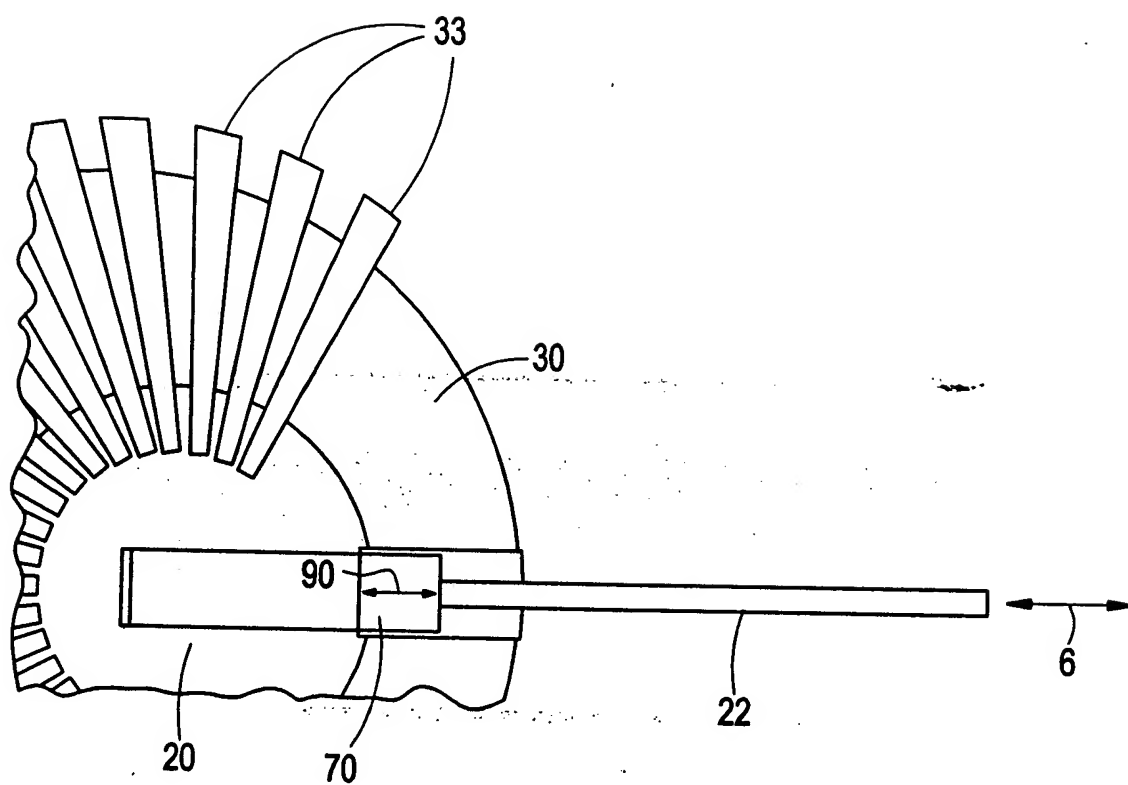


10/31

FIG. 4B

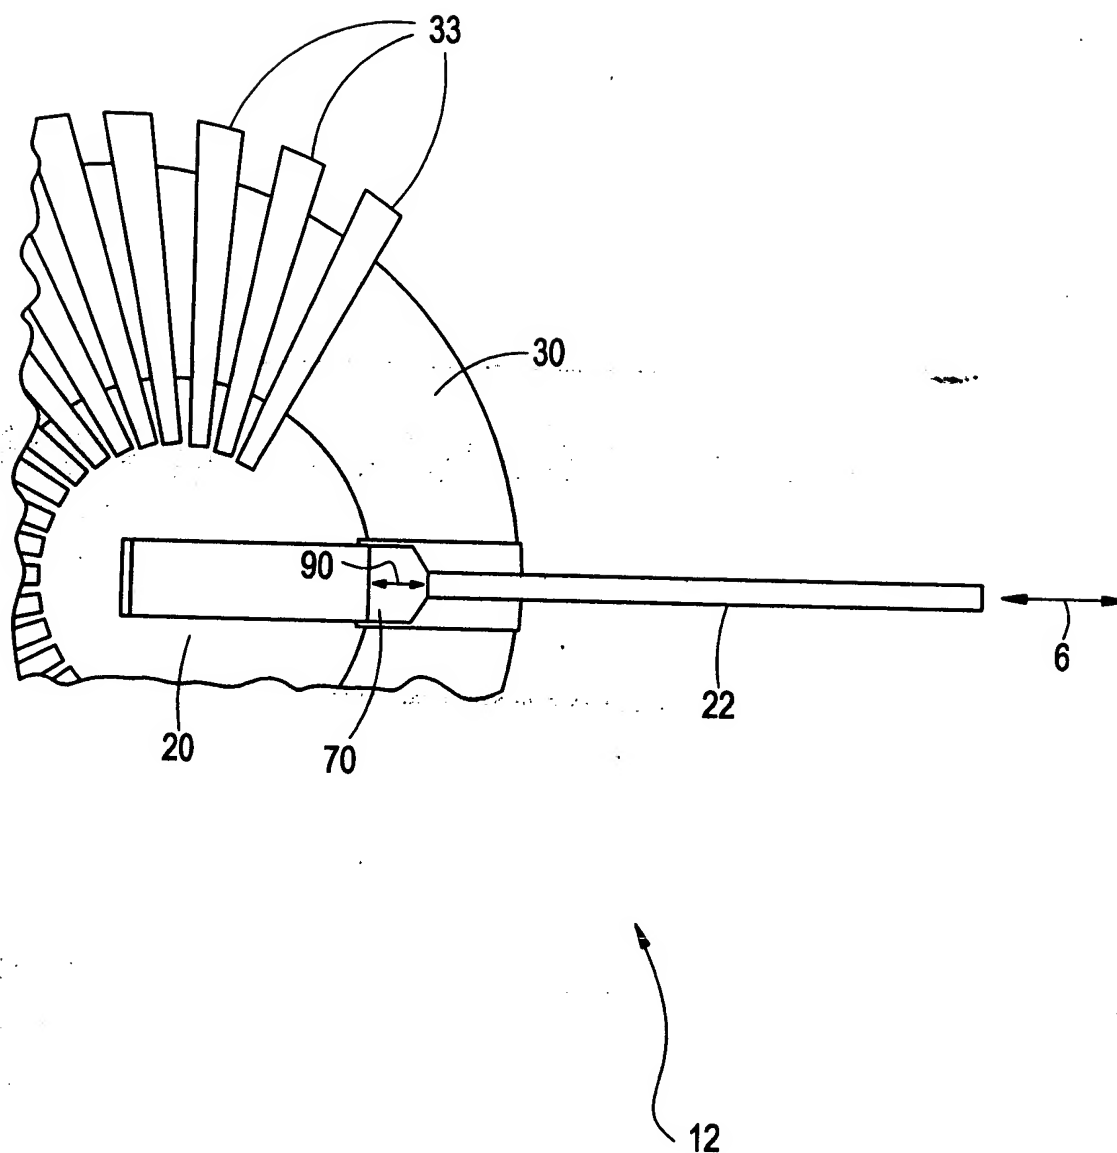


11/31

FIG. 5

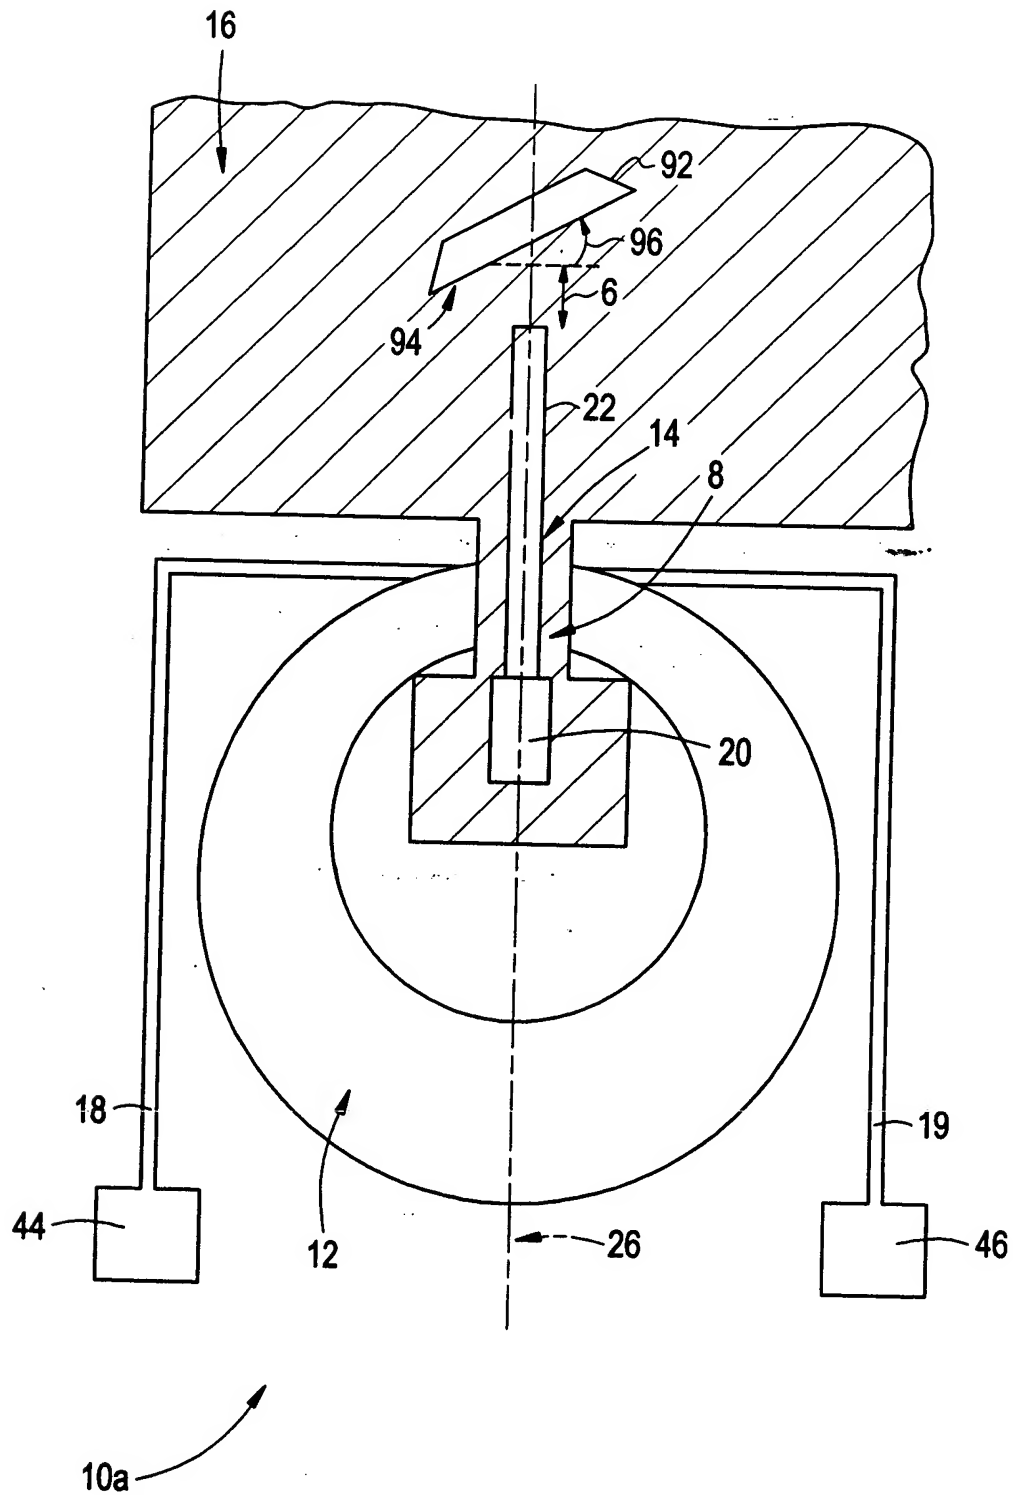


12/31

FIG. 6

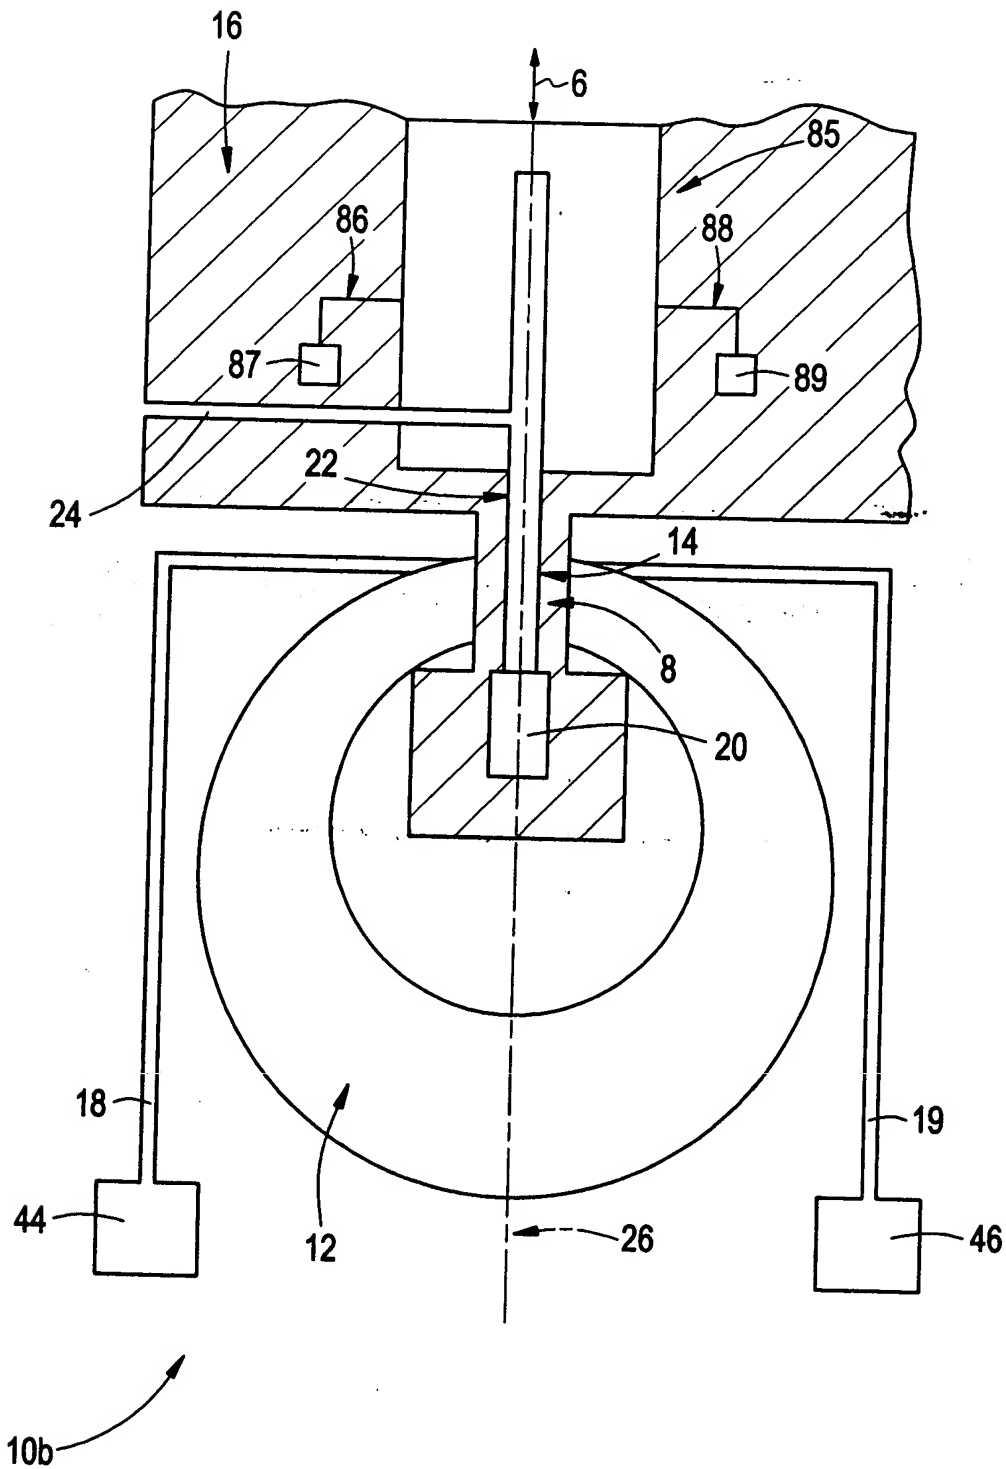

13/31

FIG. 7A

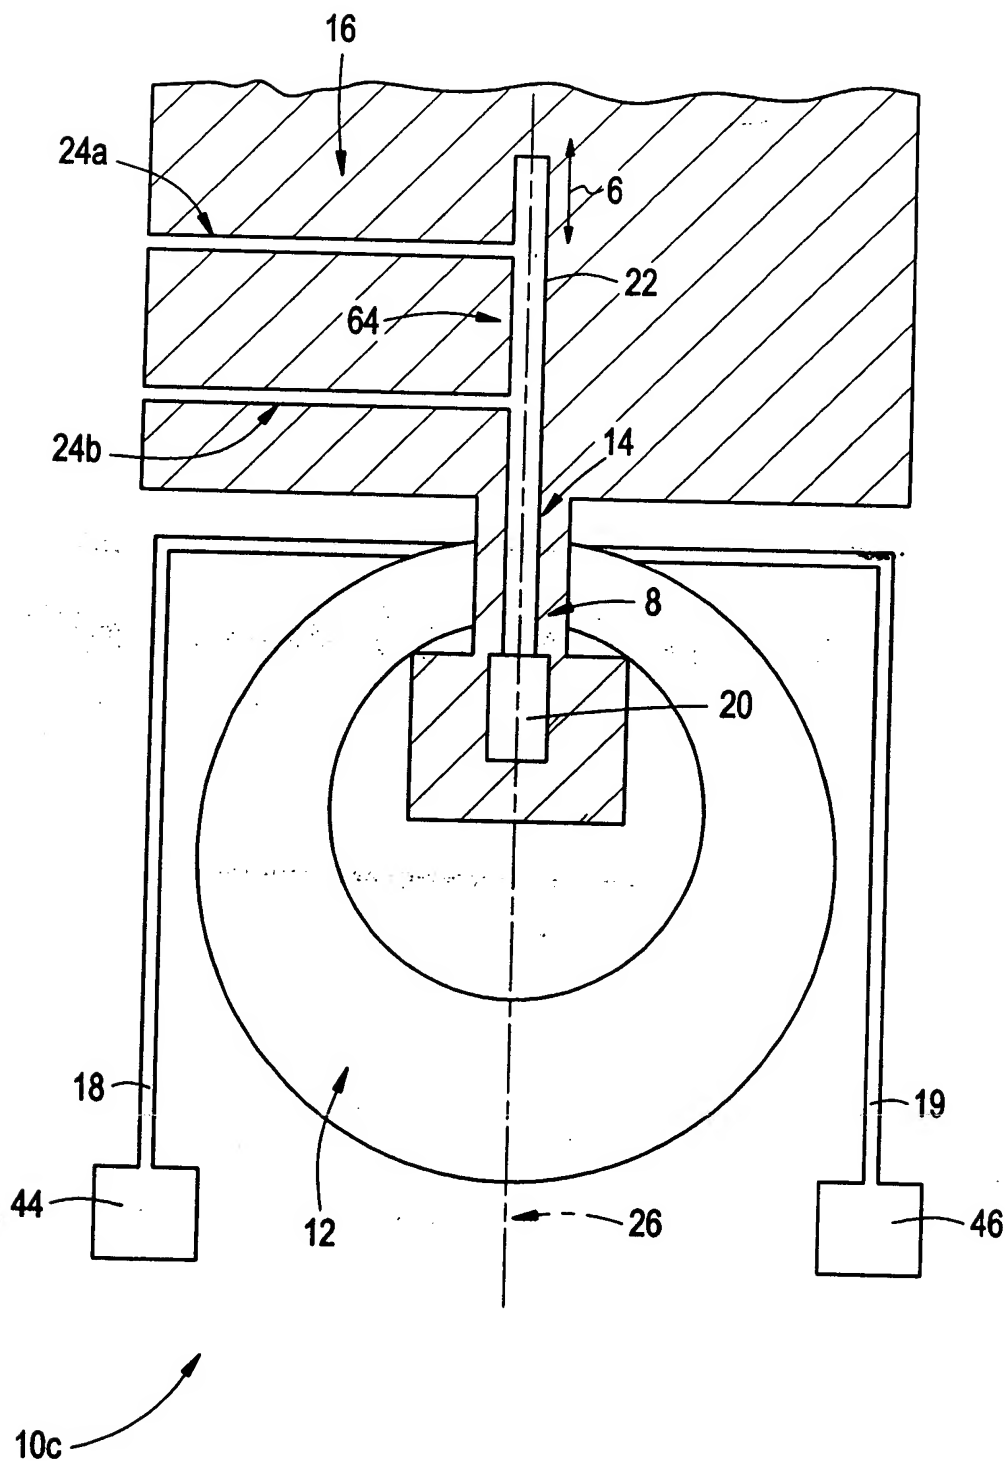

202503 53452001

14/31

FIG. 7B

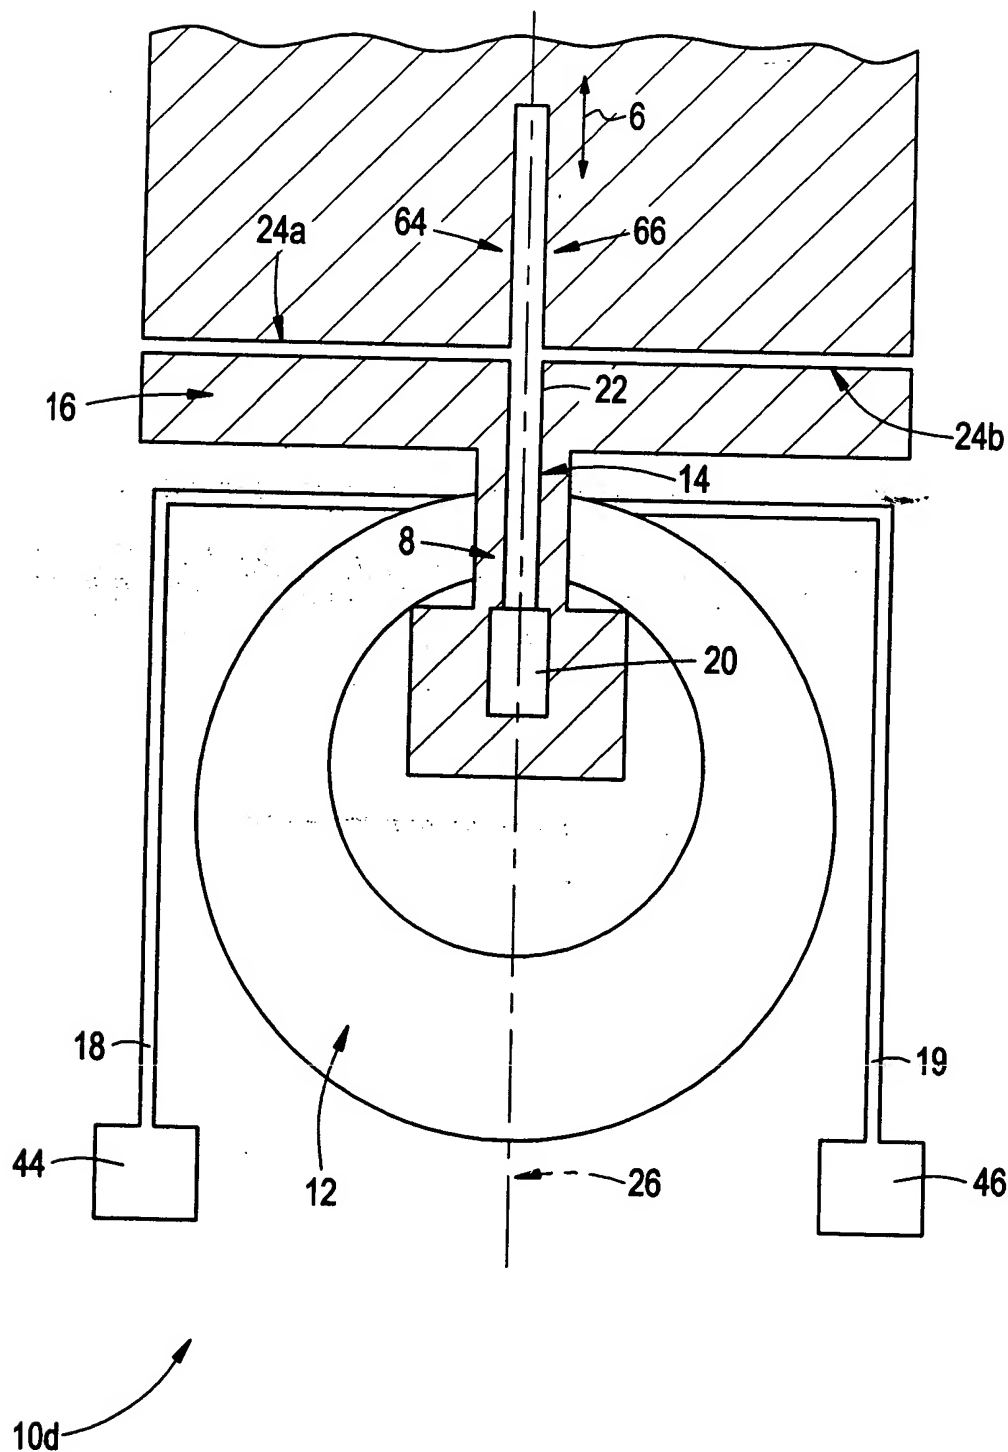


FIG. 8A



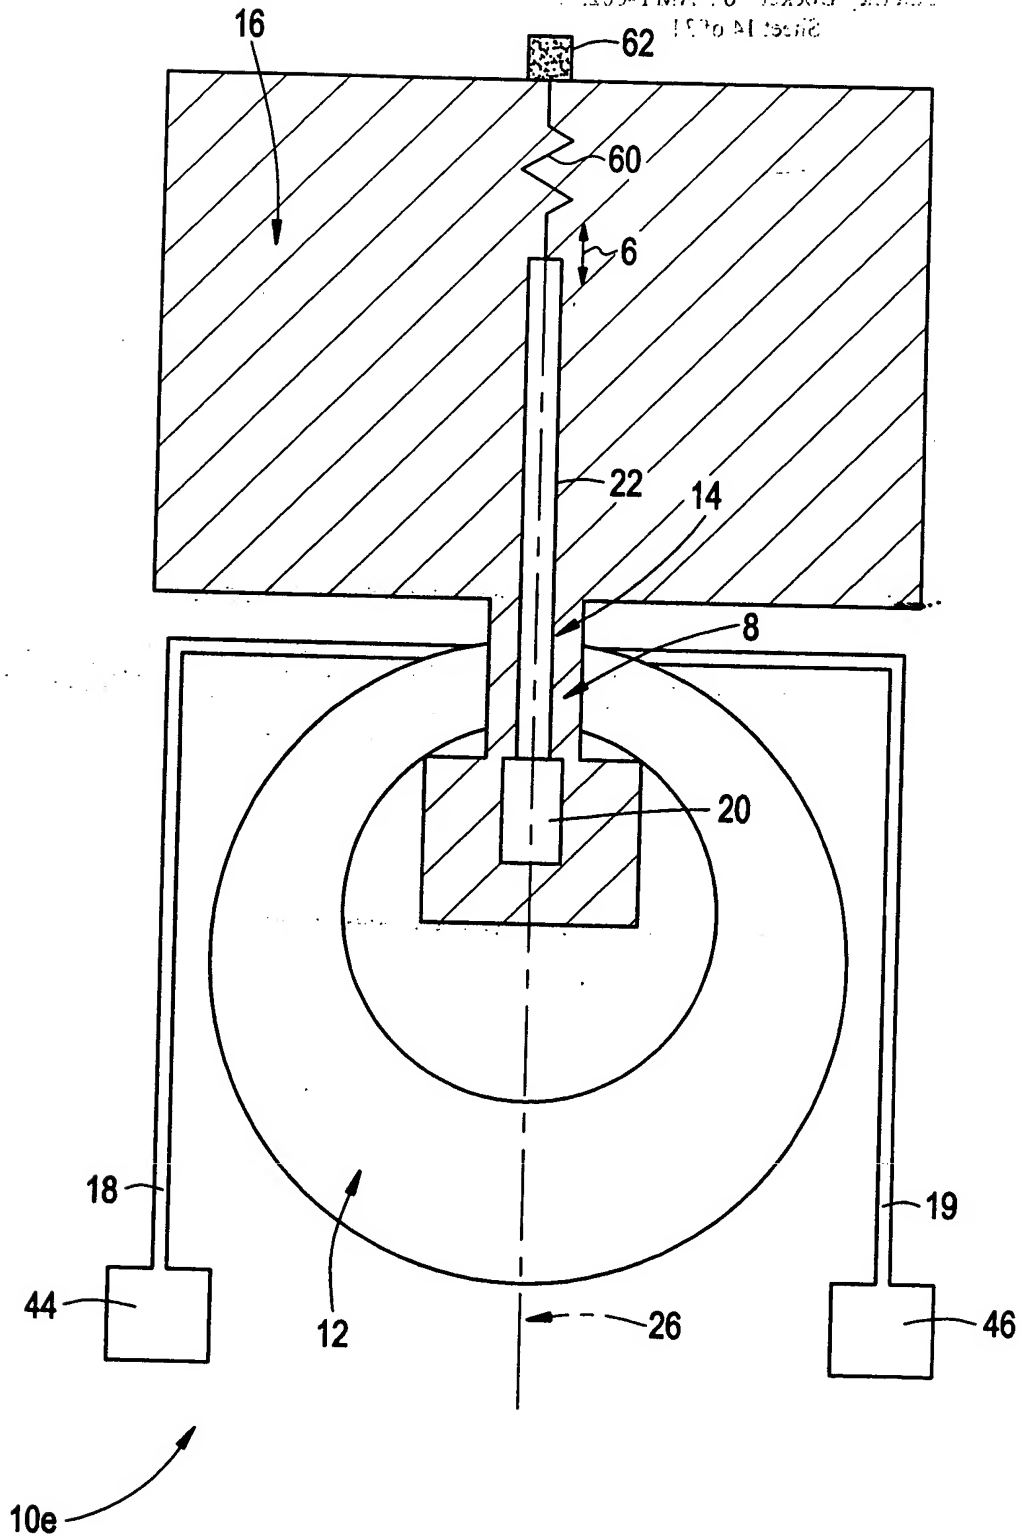


FIG. 8B

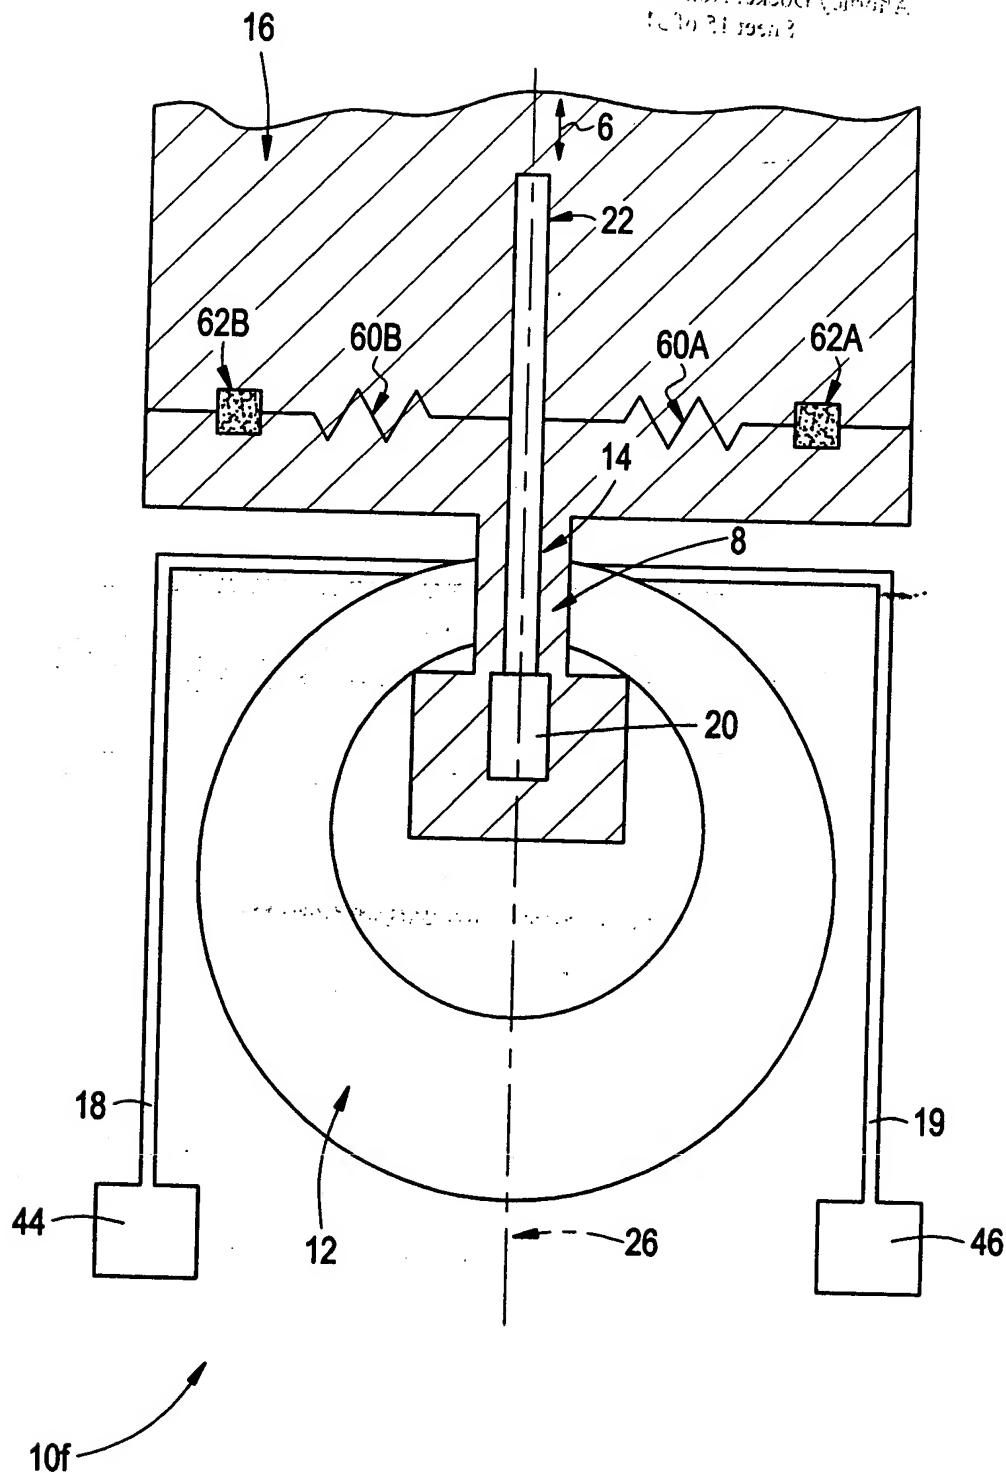


17/31

FIG. 9A

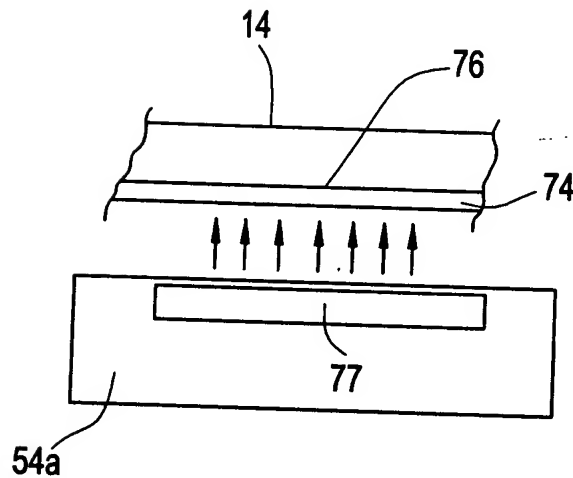


73

FIG. 9B

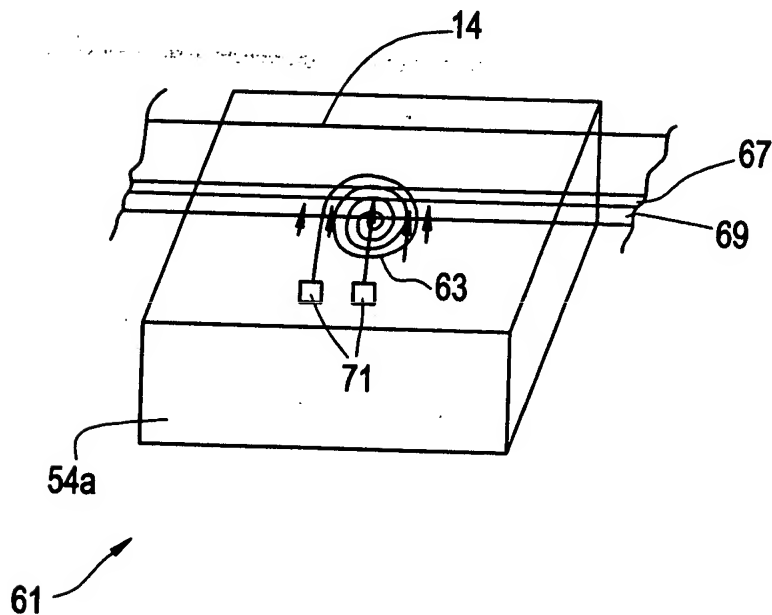


18/31

FIG. 10

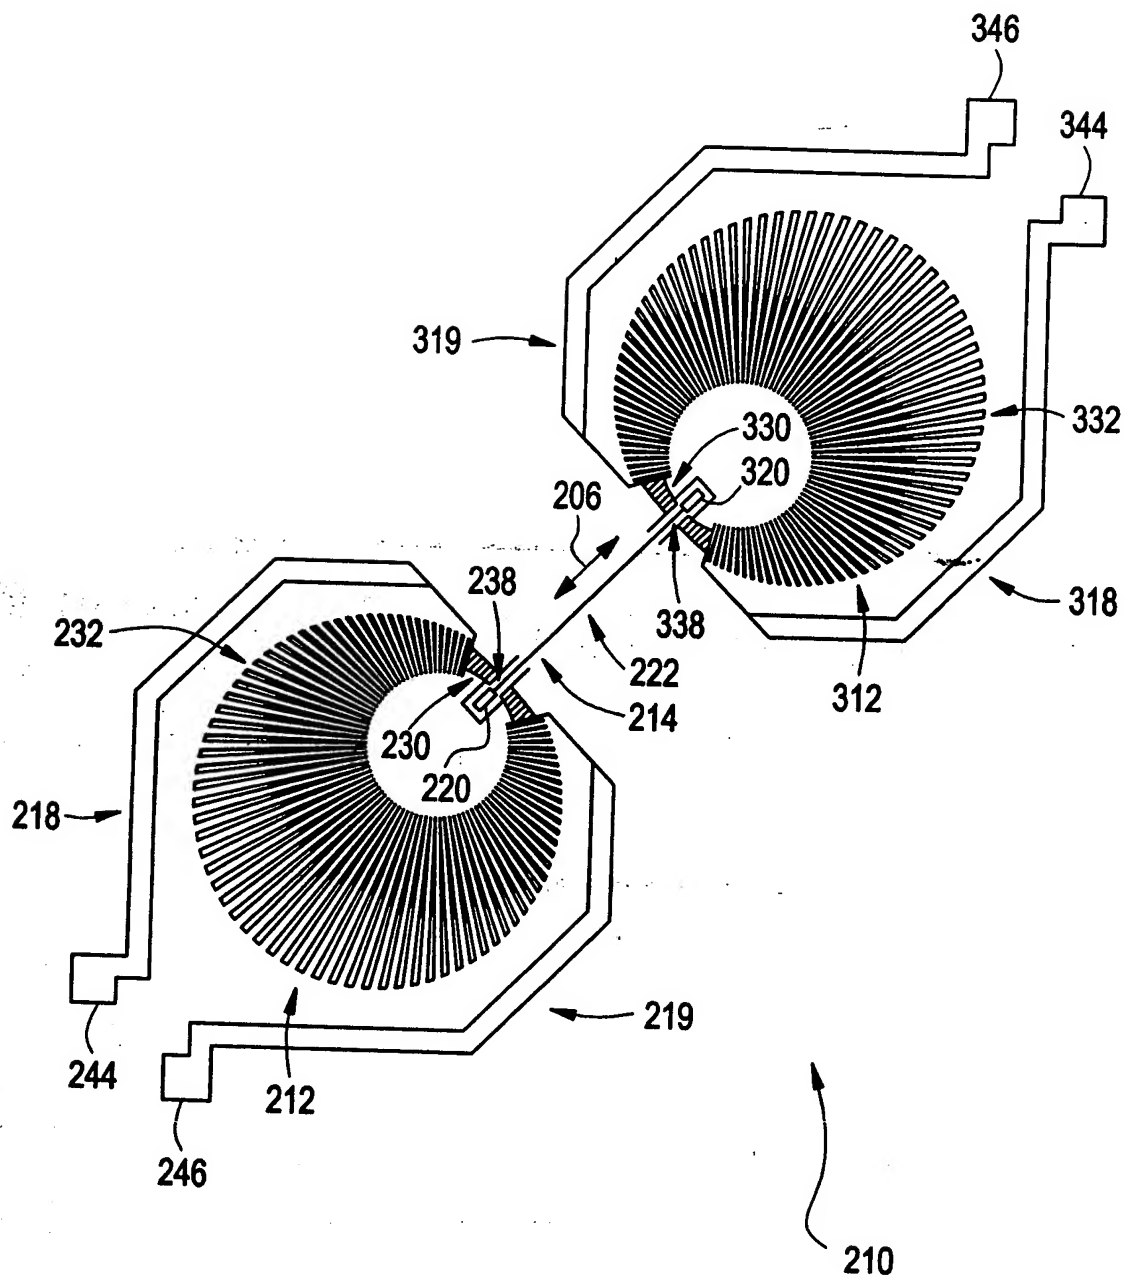

19/31

FIG. 11

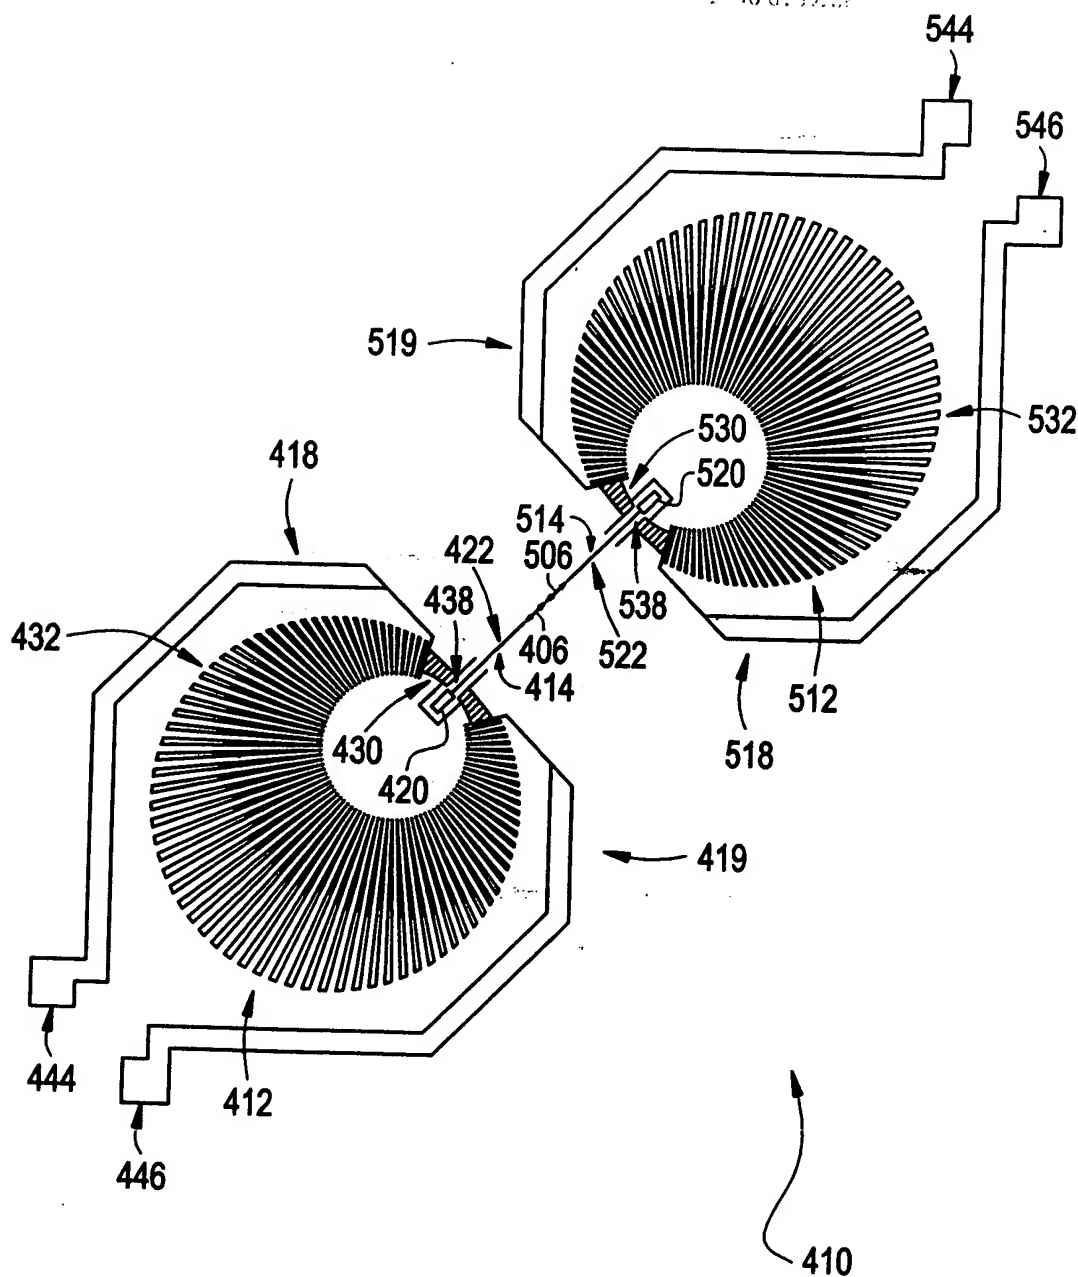

2025 RELEASE UNDER E.O. 14176

FIG. 13



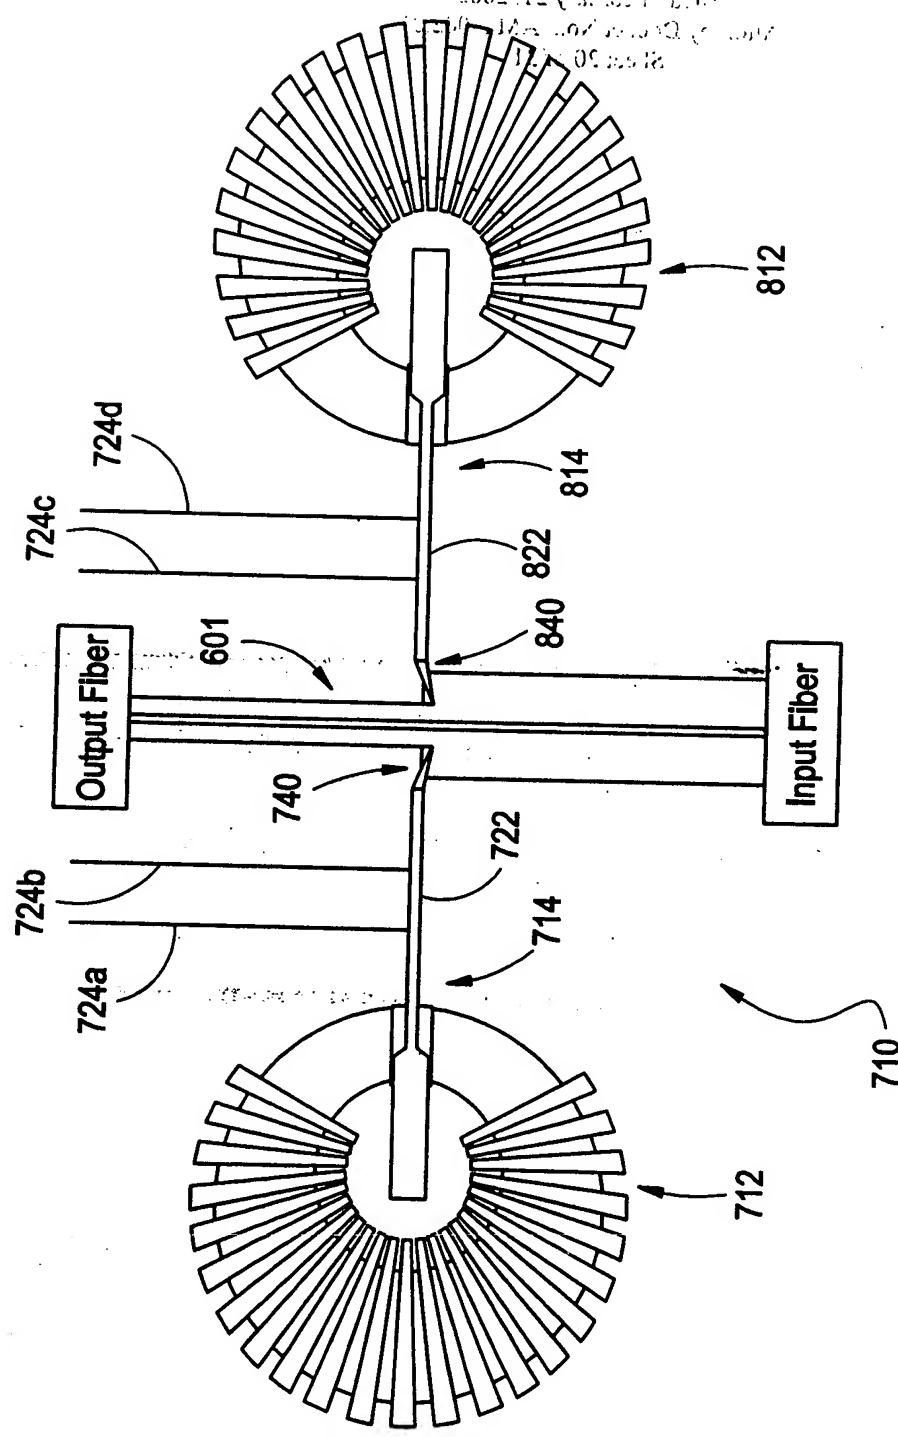


FIG. 14

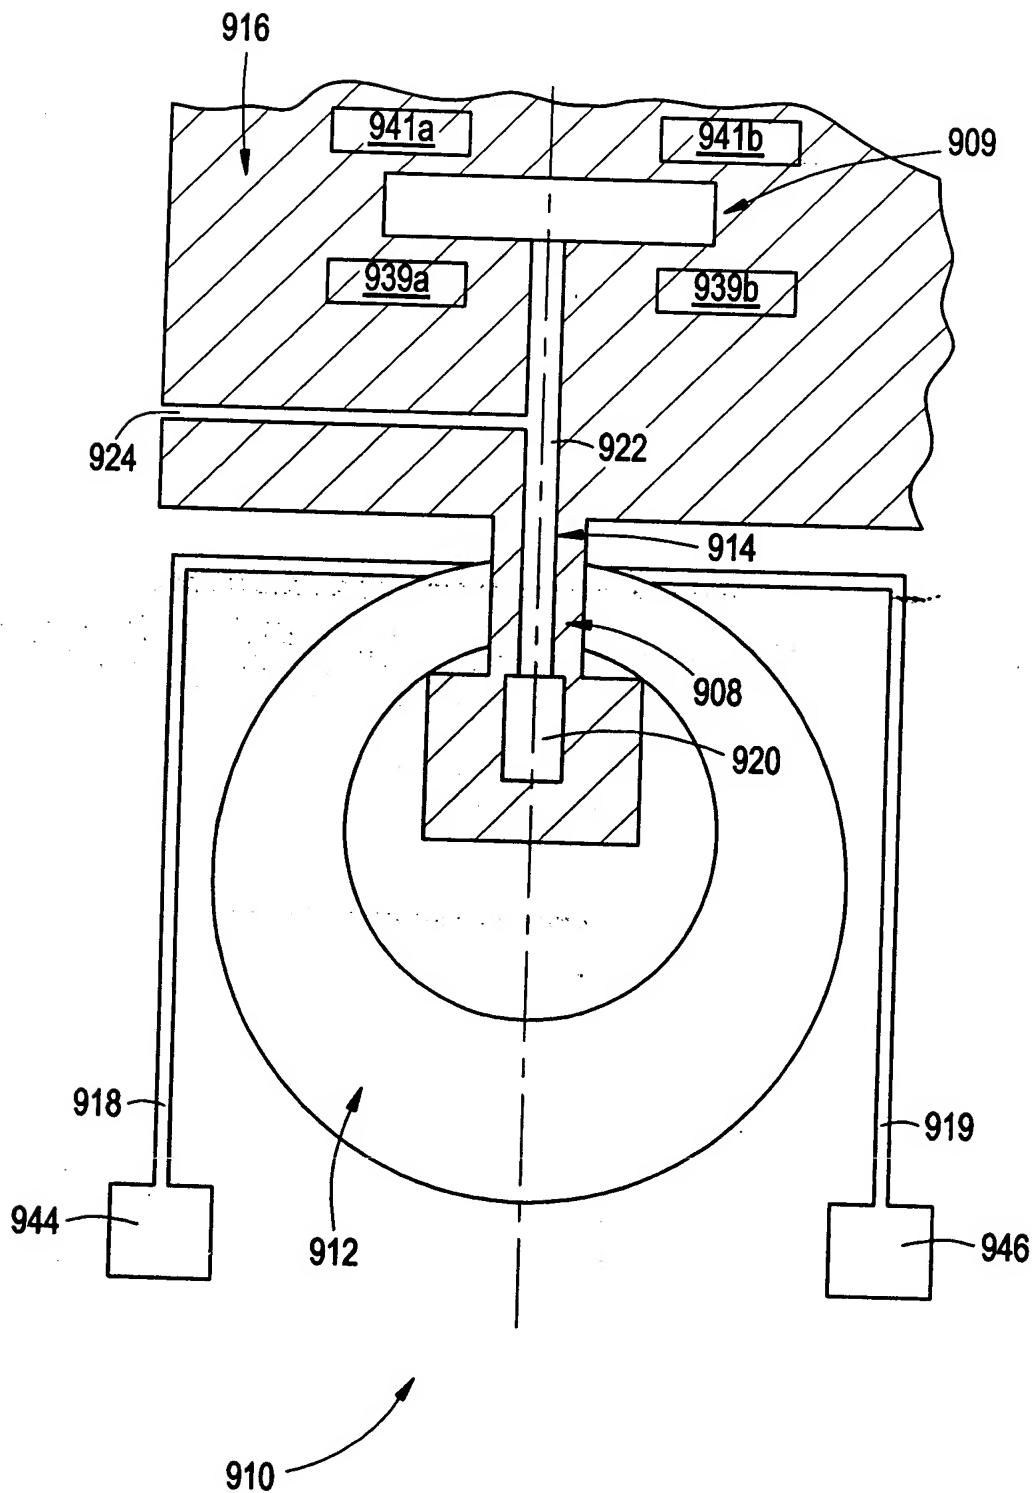

20230303 15:56:2003

FIG. 15A

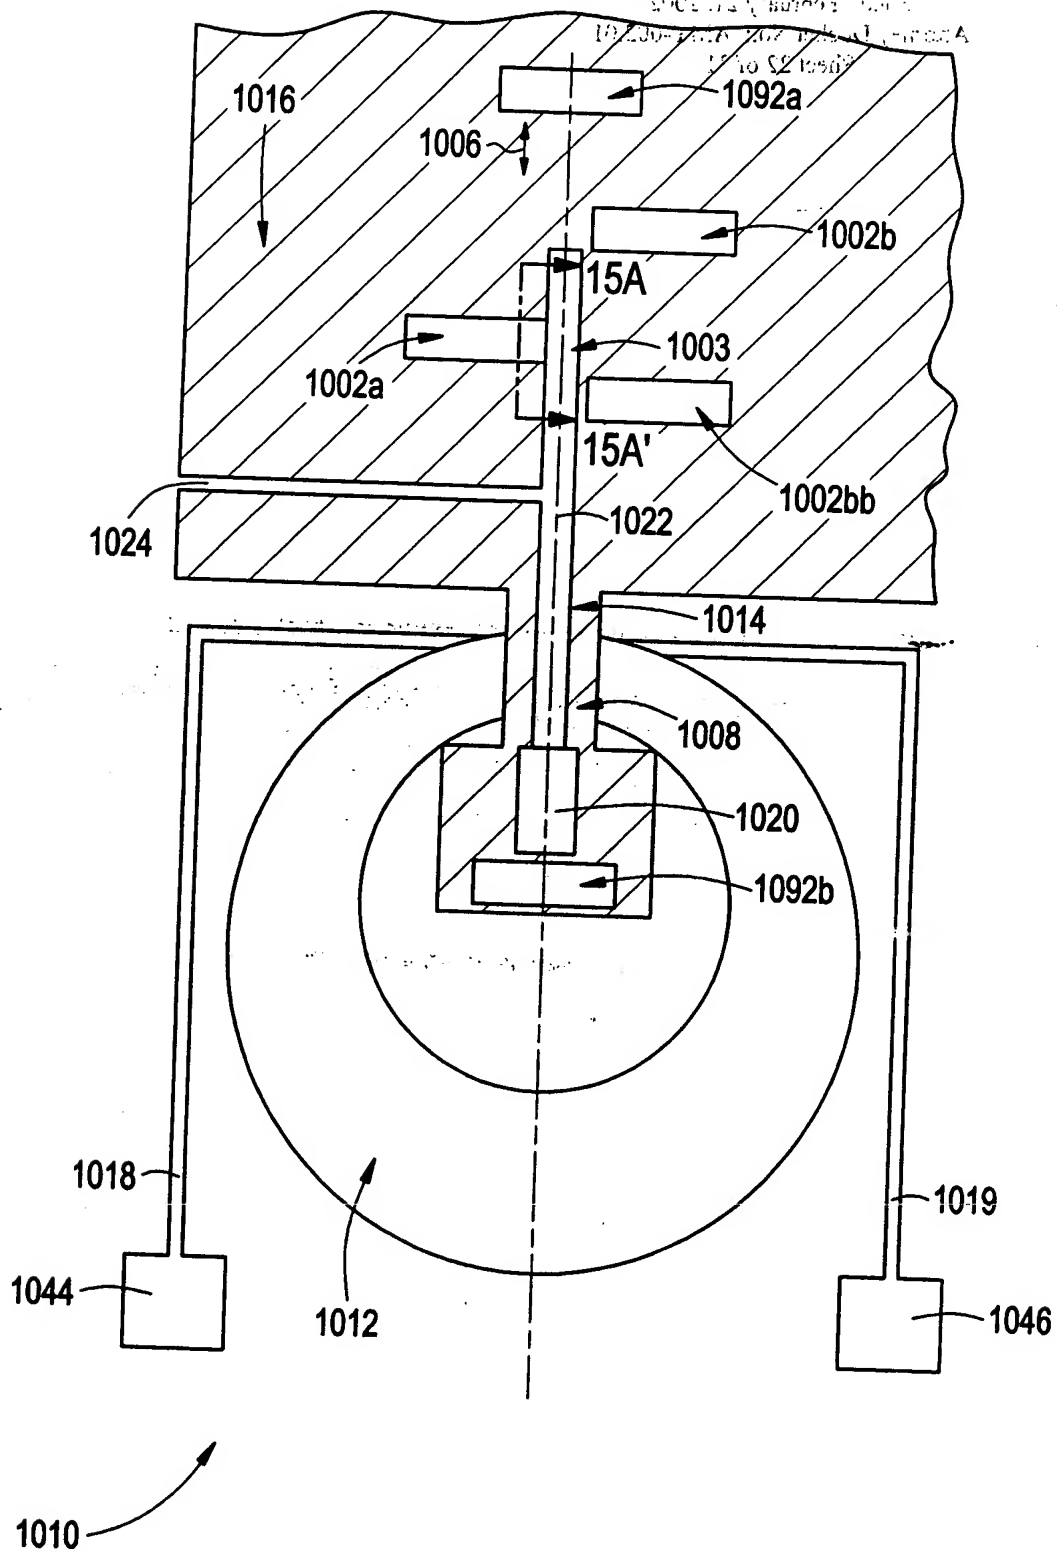

24/31

FIG. 15B


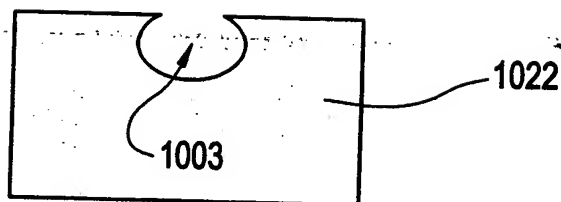


FIG. 16A

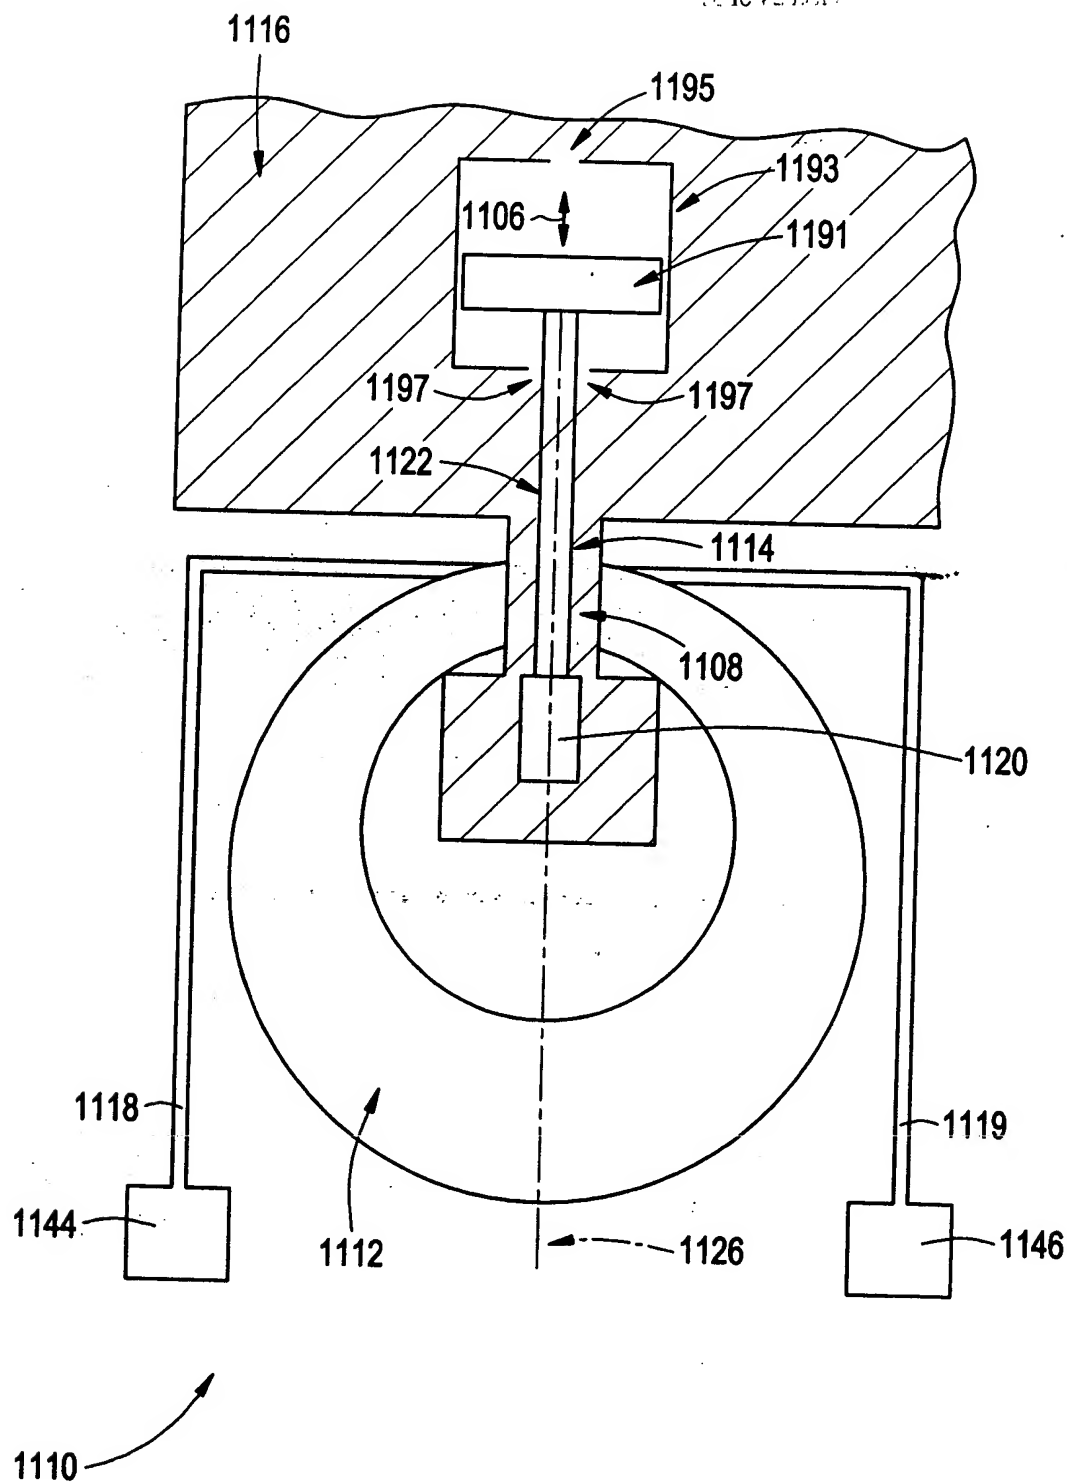

26/31

FIG. 16B

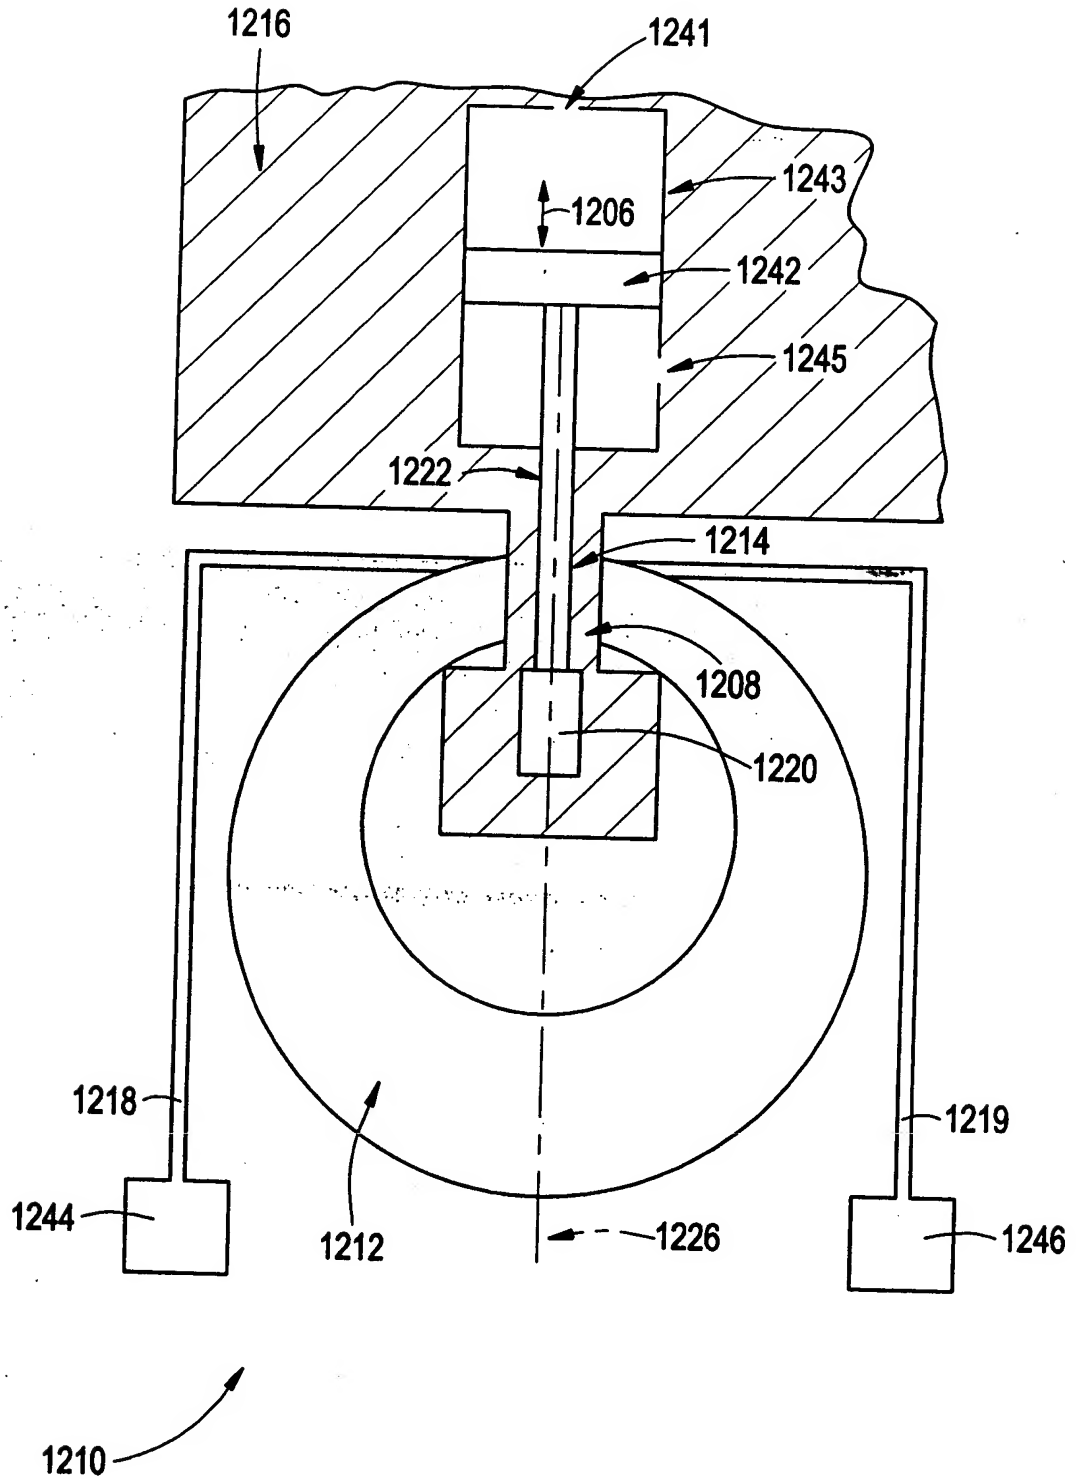


FIG. 17A

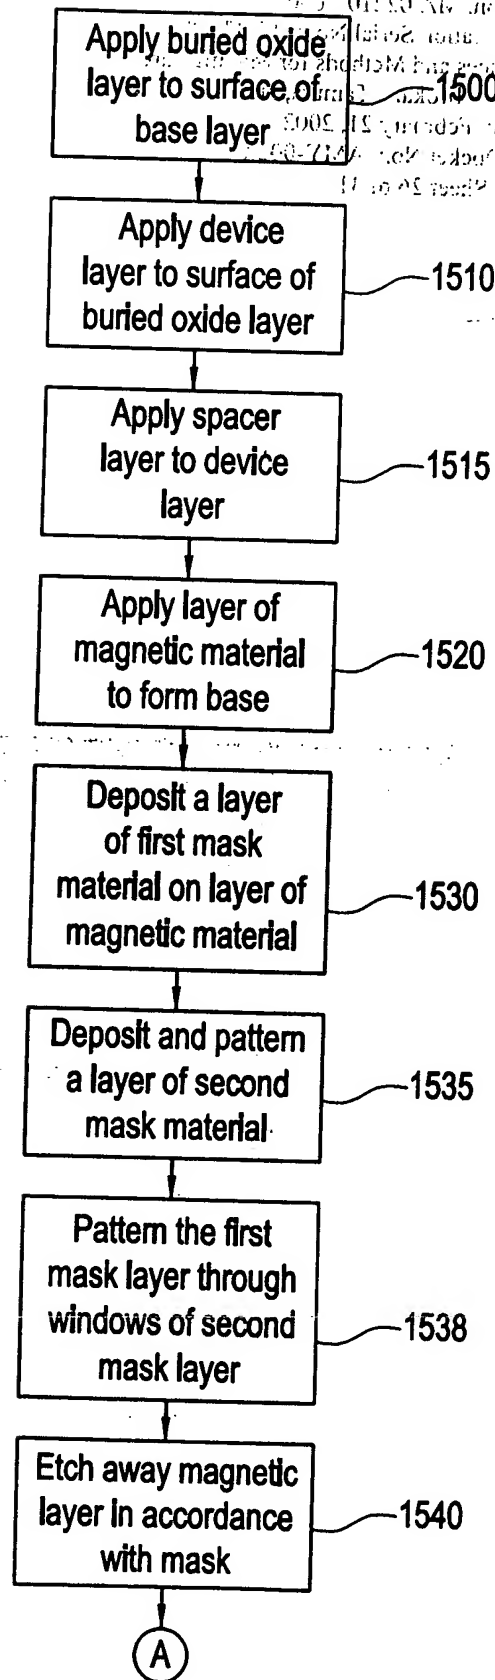


FIG. 17B

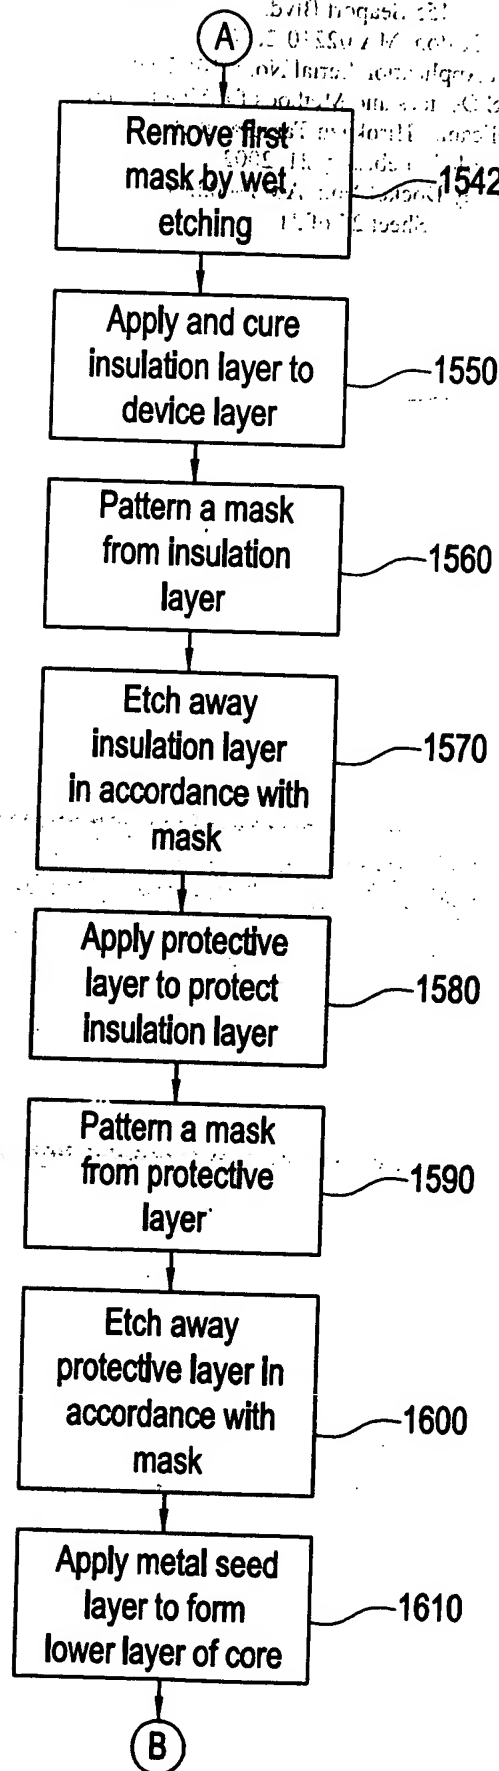


FIG. 17C

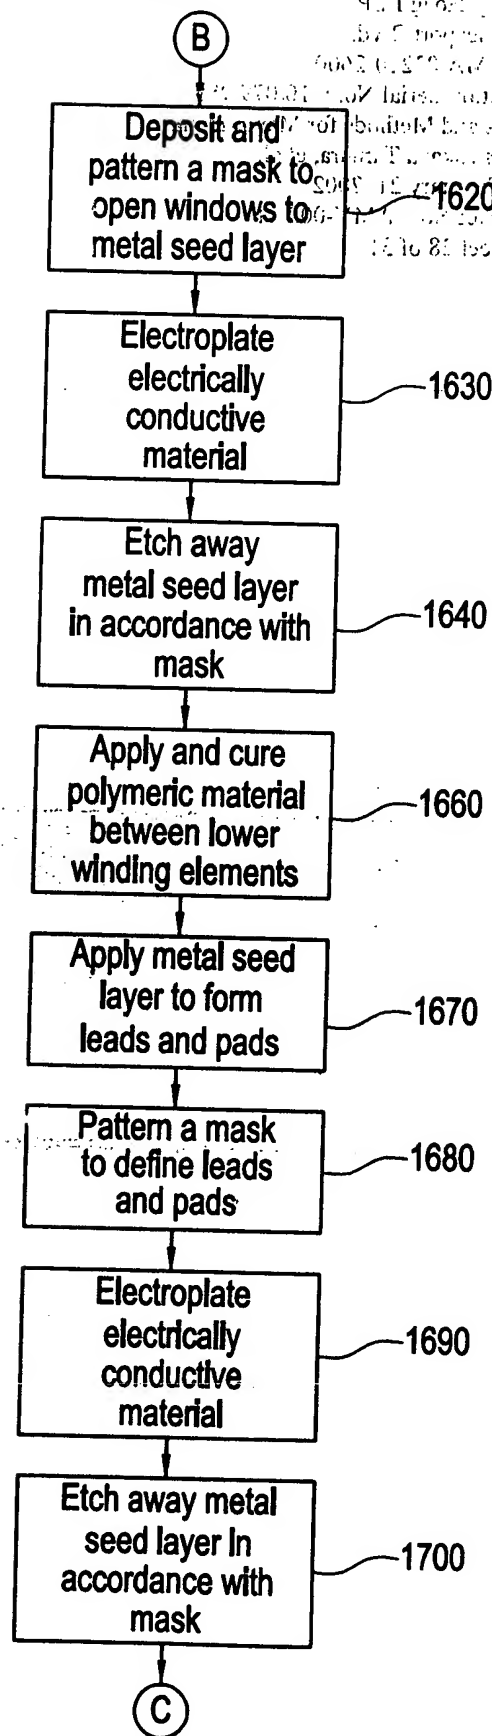


FIG. 17D

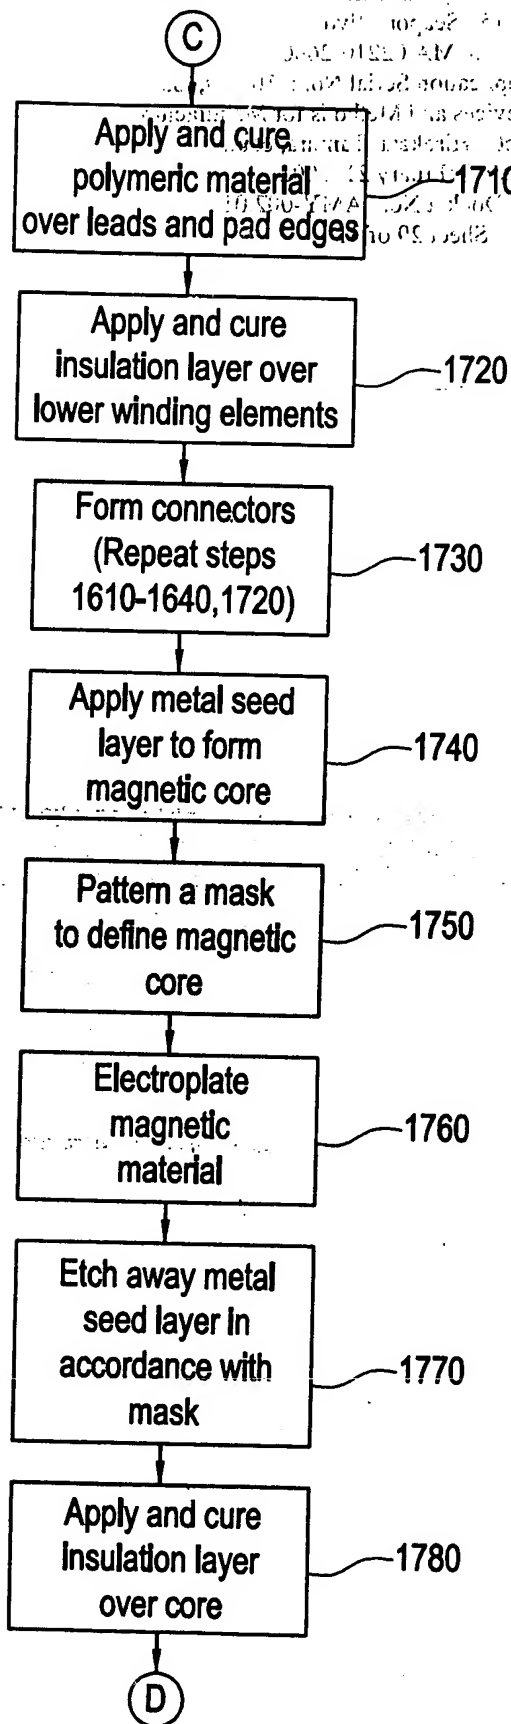


FIG. 17E

